

# Model 362 Control Valves

## Technical Sales Bulletin



**Figure 1** 362 Control Valve

The Model 362 control valve is part of the 360 Series of control Valves.

The Model 362 is a top guided, unbalanced, single port valve that is suitable for either throttling or on off control of either liquids or gases. Metal to metal seating is standard on Model 362 valves with an option for soft seating.

The standard actuator for the Model 362 control valve is a Dyna-Flo Model DFC or DFO linear actuators. These heavy-duty actuators are spring return diaphragm style, and can be used for throttling or on-off service, with or without a valve positioner.

The Model 362 control valves are manufactured to a high level of quality specifications to ensure superior performance and customer satisfaction.

## Features

### Versatility

Multiple port sizes make the 362 an easy valve to reconfigure when process applications change.

### Rugged Design

Available severe service trim and high temperature configurations are well suited to more demanding applications.

### High Temperature Option

The standard temperature rating of 450°F (232°C) can be extended to 800°F (427°C), with options available for higher temperatures.

### Emissions Reducing Packing

Help prevent the loss of process media and reduce packing maintenance with the use of Dyna-Flo's Live Loaded PTFE, graphite, and KALREZ® packing systems.

### Full Pressure Drop Capabilities

362 control valves can shut off against inlet pressures equal to the ASME B16.34 rating.

### Sour Gas Service Capability

There are standard construction materials that comply with the recommendations of the National Association of Corrosion Engineers (NACE) MR0175/ISO 15156.

### Shut Off Capability

Shut off options are available from ANSI/FCI 70.2 and IEC 60534-4 Class IV and Class VI.

### Flow Characteristic Selections

Equal percentage, linear and quick-opening flow characteristics available.

### Easy Maintenance

As with all 360 Series Valves, the 362 can be serviced in line with no special tools required.



# Model 362 Control Valves

## Technical Sales Bulletin

### SPECIFICATIONS

#### Configurations

The Model 362 control valve is a high capacity single port, globe style valve with a bolted type bonnet. The standard valve plug action is push down to close. Refer to Table 1.

Consult your Dyna-Flo sales office for other available configurations.

#### Sizes and Connection Styles (Refer to Table 1)

Model:	362
Size:	1", 1-1/2", 2", 3", 4", 6", 8"
Body:	Globe (All Sizes), Angle (1" / 2" / 3" / 4" / 6")
Rating:	ASME 150 / 300 / 600
Connection:	RF / RTJ / BWE NPT & SWE - 1", 1-1/2", and 2"

#### Maximum Inlet Pressures and Temperatures

Flanged valves consistent with ASME Class 150, 300, and 600 rating as per ASME B16.34, unless limited.

#### Maximum Pressure Drops

Maximum pressure drop is the same as maximum inlet pressure unless restricted by the following:

- Standard Valve Trim:** Figure 8.
- Low-Noise Valve Trim:** Figure 8.

#### Characteristic and Flow Direction

- Equal Percentage (Standard) - Flow Up (Globe Body) / Flow Down (Angle Body)
- Quick Opening - Flow Up (Globe Body) / Flow Down (Angle Body)
- Linear - Flow Up (Globe Body) / Flow Down (Angle Body)
- Low-Noise 3 (Linear) - Flow Up

#### Dimensions

**Valve Outline Dimension Diagram**  
Refer to Figure 2.

**Valve Assembly Dimensions**  
Refer to Tables 6 to 15.

#### Approximate Valve Body Weights

Refer to Table 3.

#### Materials

Body and bonnet material options include:

- LCC (A350 LF2/A105 Dual Grade optional bonnet material)
- WCC (A350 LF2/A105 Dual Grade optional bonnet material)
- WC9 (A182 F22 optional bonnet material)
- CF8M (A182 F316 optional bonnet material)

Refer to Figure 8 for valve construction material temperature limitations. Refer to Table 14 for trim selections.

#### Cross-Section of the Model 362 Control Valves

Refer to Figure 3.

#### Port Diameters and Maximum Valve Plug Travel

Refer to Tables 4 & 5.

#### Packing Type and Examples

The Standard packing is PTFE V-ring. Live-loaded low emission, graphite, KALREZ® and other packing arrangements are available. Refer to Figure 7.

#### Maximum Valve Sizing Coefficients

For standard coefficients at maximum travel, refer to Table 17 & 18. For full list of coefficients refer to document P-CVSM.

#### Service Application

Refer to Tables 11 - 16.

For more information and other options contact your Dyna-Flo sales office.

# Model 362 Control Valves

## Technical Sales Bulletin



Table 1

### Available Valve Configurations

Valve Model	Valve Size Inch	End Connection					
		NPT <sup>(1)</sup>	RF <sup>(2)</sup> and RTJ <sup>(3)</sup> (Flanged)			BWE <sup>(4)</sup>	SWE <sup>(5)</sup>
			ASME Class 150	ASME Class 300	ASME Class 600		
362	1 / 1-1/2 / 2	✓	✓	✓	✓	✓	✓
	3 / 4 / 6 / 8	✗	✓	✓	✓	✓	✗
362A	1 & 2	✗	✓	✓	✓	✓	✗
	3 / 4 / 6	✗	✓	✓	✓	✓	✗
Notes:	1 - NPT = Screwed.						
	2 - RF = Raised Face.						
	3 - RTJ = Ring Type Joint.						
	4 - BWE = Butt Weld (ASME Class 600 Only).						
	5 - SWE = Socket Weld (ASME Class 600 Only).						

Table 2

### Standard Shut-Off Classifications (in accordance with ANSI/FCI 70.2 and IEC 60534-4)

Valve Trim	Seat Option	Shut-Off Class	
All	PTFE (Soft Seated)	Standard	Class VI
	Metal	Standard	Class IV

Table 3

### Approximate Valve Weights

Valve Size (inch)	lb	Kg
1	30	14
1-1/2	45	20
2	85	39
3	125	57
4	170	77
6	350	159
8	900	408



# Model 362 Control Valves

## Technical Sales Bulletin

Table 4

Globe Valve Size, Port Diameters, Plug Travel, Stem and Yoke Boss Diameters

Port	Valve Size	Port Diameter		Max Valve Plug Travel		Yoke Boss Diameter (YBD)			
		Inch	mm	Inch	mm	Stem Diameter		YBD	
						Inch	mm	Inch	mm
Full Port	1	1-5/16	33.3	3/4	19.1	3/8	9.5	2-1/8	54.0
						1/2	12.7	2-13/16	71.4
	1-1/2	1-7/8	47.6	3/4	19.1	3/8	9.5	2-1/8	54.0
						1/2	12.7	2-13/16	71.4
	2	2-5/16	58.7	1-1/8	28.6	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	3	3-7/16	87.3	1-1/2	38.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	4	4-3/8	111.1	2	50.8	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	6	7	177.7	2	50.8	3/4	19.1	3-9/16	90.5
						1	25.4	5	127
	8	8	203.2	2	50.8	3/4	19.1	3-9/16	90.5
						1	25.4	5	127
				3	76.2	3/4	19.1	3-9/16	90.5
						1	25.4	5	127
Reduced Port	1-1/2	1-5/16	33.3	3/4	19.1	3/8	9.5	2-1/8	54.0
						1/2	12.7	2-13/16	71.4
	2	1-5/16	33.3	3/4	19.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	3	2-5/16	58.7	1-1/8	28.6	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	4	2-7/8	73.0	1-1/2	38.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	6	4-3/8	111.1	2	50.8	3/4	19.1	3-9/16	90.5
						1	25.4	5	127

# Model 362 Control Valves

## Technical Sales Bulletin



Table 5

Angle Valve Size, Port Diameters, Plug Travel, Stem and Yoke Boss Diameters

Port	Valve Size	Port Diameter		Max Valve Plug Travel		Yoke Boss Diameter (YBD)			
		Inch	mm	Inch	mm	Stem Diameter		YBD	
						Inch	mm	Inch	mm
Full Port	1	1-5/16	33.3	3/4	19.1	3/8	9.5	2-1/8	54.0
						1/2	12.7	2-13/16	71.4
	2	1-7/8	47.6	3/4	19.1	3/8	9.5	2-1/8	54.0
						1/2	12.7	2-13/16	71.4
	3	2-7/8	73.0	1-1/2	38.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	4	3-7/16	87.3	1-1/2	38.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
	6	4-3/8	111.1	2	50.8	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
						1	25.4	5	127
	Reduced Port	2	1-5/16	33.3	3/4	19.1	3/8	9.5	2-1/8
1/2							12.7	2-13/16	71.4
4		2-5/16	58.7	1-1/8	28.6	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5
6		2-7/8	73.0	1-1/2	38.1	1/2	12.7	2-13/16	71.4
						3/4	19.1	3-9/16	90.5



# Model 362 Control Valves

## Technical Sales Bulletin

Table 6

**Valve Body Dimensions with BWE\* End Connection** Inches (mm)  
 (Refer to Figure 2 on Page 10) (For 'C' Dimensions refer to Tables 13 to 15 on Page 9)

Valve Size Inch	Globe Body		Angle Body
	A	B	A
1	8.25 (210)	2.38 (60)	4.12 (105)
1-1/2	9.75 (248)	2.81 (71)	—
2	11.12 (282)	3.06 (78)	5.62 (143)
3	13.25 (337)	3.81 (97)	6.62 (168)
4	15.50 (394)	5.06 (129)	7.75 (197)
6	20.00 (508)	5.51 (140)	10.00 (254)
8	24.00 (610)	7.50 (191)	—

\*NOTE: BWE - Butt weld (ASME Class 600 Only).

Table 7

**Valve Body Dimensions with SWE\* End Connection** Inches (mm)  
 (Refer to Figure 2 on Page 10) (For 'C' Dimensions refer to Tables 13 to 15 on Page 9)

Valve Size Inch	Globe Body		Angle Body
	A	B	A
1	8.25 (210)	2.38 (60)	4.12 (105)
1-1/2	9.88 (251)	2.81 (71)	—
2	11.25 (286)	3.06 (78)	5.62 (143)
3	—	—	—
4	—	—	—
6	—	—	—
8	—	—	—

\*NOTE: SWE - Socket weld (ASME Class 600 Only).

# Model 362 Control Valves

## Technical Sales Bulletin



Table 8

**Angle Valve Body Dimensions with RF\* End Connection** Inches (mm)  
 (Refer to Figure 2 on Page 10) (For 'C' Dimensions refer to Tables 13 to 15 on Page 9)

Valve Size Inch	End Connection	A
1 Inch	150	3.62 (92)
	300	3.88 (99)
	600	4.12 (105)
2 Inch	150	5.00 (127)
	300	5.25 (133)
	600	5.62 (143)
3 Inch	150	5.88 (149)
	300	6.25 (159)
	600	6.62 (168)
4 Inch	150	6.94 (176)
	300	7.25 (184)
	600	7.75 (197)
6 Inch	150	8.88 (226)
	300	9.31 (236)
	600	10.00 (254)

\*NOTE: RF - Raised Face.

Table 9

**Angle Valve Body Dimensions with RTJ\* End Connection** Inches (mm)  
 (Refer to Figure 2 on Page 10) (For 'C' Dimensions refer to Tables 13 to 15 on Page 9)

Valve Size Inch	End Connection	A
1 Inch	150	3.88 (99)
	300	4.12 (105)
	600	4.12 (105)
2 Inch	150	5.25 (133)
	300	5.56 (141)
	600	5.69 (145)
3 Inch	150	6.12 (155)
	300	6.56 (167)
	600	6.69 (170)
4 Inch	150	7.19 (183)
	300	7.56 (192)
	600	7.81 (198)
6 Inch	150	9.12 (232)
	300	9.62 (244)
	600	10.06 (256)

\*NOTE: RTJ - Raised Type Joint.



# Model 362 Control Valves

## Technical Sales Bulletin

Table 10

### Valve Assembly (NPT End Connection) with Standard Actuator Envelope Dimensions

(with common stem diameter) Inches (mm) (Refer to Figure 2)

Valve Size (inch)	End Connection	A	B	C*
1	NPT	8.25 (210)	2.38 (60)	5.00 (127)
1-1/2	NPT	9.88 (251)	2.81 (71)	4.88 (124)
2	NPT	11.25 (286)	3.06 (78)	6.50 (165)
	NPT	11.25 (286)	3.06 (78)	6.50 (165)
	NPT	11.25 (286)	3.06 (78)	6.50 (165)

\*NOTE: 'C' dimensions will vary depending on valve stem diameter, refer to Tables 13 - 15 on Page 9.

Table 11

### Valve Assembly (RF End Connection) with Standard Actuator Envelope Dimensions

(with common stem diameter) Inches (mm) (Refer to Figure 2)

Valve Size (inch)	End Connection	A	B	C*
1	150	7.25 (184)	2.38 (60)	5.00 (127)
	300	7.75 (197)	2.38 (60)	5.00 (127)
	600	8.25 (210)	2.38 (60)	5.00 (127)
1-1/2	150	8.75 (222)	2.81 (71)	4.88 (124)
	300	9.25 (235)	2.81 (71)	4.88 (124)
	600	9.88 (251)	2.81 (71)	4.88 (124)
2	150	10.00 (254)	3.06 (78)	6.50 (165)
	300	10.50 (267)	3.06 (78)	6.50 (165)
	600	11.25 (286)	3.06 (78)	6.50 (165)
3	150	11.75 (299)	3.81 (97)	7.50 (191)
	300	12.50 (318)	3.81 (97)	7.50 (191)
	600	13.25 (337)	3.81 (97)	7.50 (191)
4	150	13.88 (353)	5.06 (129)	8.69 (221)
	300	14.50 (368)	5.06 (129)	8.69 (221)
	600	15.50 (394)	5.06 (129)	8.69 (221)
6	150	17.75 (451)	5.50 (140)	9.88 (311)
	300	18.62 (473)	5.50 (140)	9.88 (311)
	600	20.00 (508)	5.50 (140)	9.88 (311)
8	150	21.38 (543)	7.50 (191)	*
	300	22.38 (556)	7.50 (191)	*
	600	24.00 (610)	7.50 (191)	*

\*NOTE: 'C' dimensions will vary depending on valve stem diameter, refer to Tables 13 - 15 on Page 9.



# Model 362 Control Valves

## Technical Sales Bulletin



Table 12

### Valve Assembly (RTJ End Connection) with Standard Actuator Envelope Dimensions

(with common stem diameter) Inches (mm) (Refer to Figure 2)

Valve Size (inch)	End Connection	A	B	C*
1	150	7.75 (197)	2.38 (60)	5.00 (127)
	300	8.25 (210)	2.38 (60)	5.00 (127)
	600	8.25 (210)	2.38 (60)	5.00 (127)
1-1/2	150	9.25 (235)	2.81 (71)	4.88 (124)
	300	9.75 (248)	2.81 (71)	4.88 (124)
	600	9.88 (251)	2.81 (71)	4.88 (124)
2	150	10.50 (267)	3.06 (78)	6.50 (165)
	300	11.12 (282)	3.06 (78)	6.50 (165)
	600	11.38 (289)	3.06 (78)	6.50 (165)
3	150	12.25 (311)	3.81 (97)	7.50 (191)
	300	13.12 (333)	3.81 (97)	7.50 (191)
	600	13.38 (340)	3.81 (97)	7.50 (191)
4	150	14.38 (365)	5.06 (129)	8.69 (221)
	300	15.12 (384)	5.06 (129)	8.69 (221)
	600	15.62 (397)	5.06 (129)	8.69 (221)
6	150	18.25 (464)	5.50 (140)	9.88 (311)
	300	19.25 (489)	5.50 (140)	9.88 (311)
	600	20.12 (511)	5.50 (140)	9.88 (311)
8	150	21.88 (556)	7.50 (191)	*
	300	23.00 (584)	7.50 (191)	*
	600	24.12 (613)	7.50 (191)	*

\*NOTE: 'C' dimensions will vary depending on valve stem diameter, refer to Tables 13 - 15 on Page 9.



# Model 362 Control Valves

## Technical Sales Bulletin

Table 13

**Valve Dimensions for Standard Bonnet Assembly - Inches (mm) (Refer to Figure 2)**

Valve Size (Inch)	C			
	3/8 (9.5) Stem Diameter	1/2 (12.7) Stem Diameter	3/4 (19.1) Stem Diameter	1 (25.4) Stem Diameter
1	5.00 (127)	5.88 (149)	—	—
1-1/2	4.88 (124)	5.75 (146)	—	—
2	—	6.50 (165)	6.38 (162)	—
3	—	7.50 (191)	7.38 (187)	—
4	—	8.69 (221)	8.56 (217)	—
6	—	—	9.88 (251)	10.62 (270)
8 <sup>2</sup>	—	—	14.75 (375) <sup>1</sup>	16.75 (426)

**NOTE:** 1 - Available in WCC Body Material Only.  
2 - Extension Bonnets are the standard bonnet used for 8 inch valve construction.

Table 14

**Style 1 Extension Bonnet Valve Dimensions - Inches (mm) (Refer to Figure 2)**

Valve Size (Inch)	C			
	3/8 (9.5) Stem Diameter	1/2 (12.7) Stem Diameter	3/4 (19.1) Stem Diameter	1 (25.4) Stem Diameter
1	8.38 (213)	9.88 (251)	—	—
1-1/2	8.25 (210)	9.75 (248)	—	—
2	—	10.50 (267)	—	—
3	—	11.50 (292)	11.69 (297)	—
4	—	12.69 (322)	12.88 (327)	—
6	—	—	14.06 (357)	15.81 (402)
8 (Standard)	—	—	16.56 (421)	17.75 (450)

Table 15

**Style 2 Extension Bonnet Valve Dimensions - Inches (mm) (Refer to Figure 2)**


Valve Size (Inch)	C		
	3/8 (9.5) Stem Diameter	1/2 (12.7) Stem Diameter	3/4 (19.1) Stem Diameter
1	11.94 (303)	12.56 (319)	—
1-1/2	11.81 (300)	12.44 (316)	—
2	—	18.31 (465)	—
3	—	19.50 (495)	19.19 (487)
4	—	20.69 (526)	20.38 (518)
6	—	—	21.38 (543)
8	—	—	24.44 (621)

# Model 362 Control Valves


Technical Sales Bulletin




**FLANGED END  
CONNECTION  
GLOBE BODY**

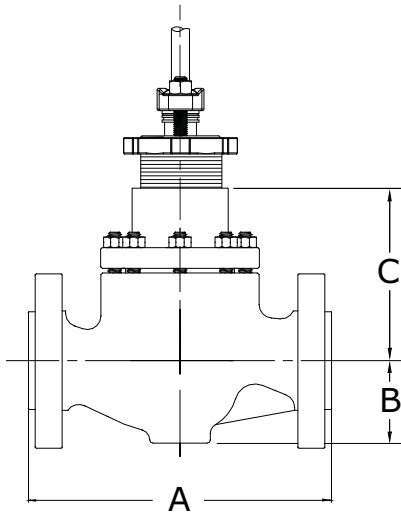


**FLANGED END  
CONNECTION  
ANGLE BODY**

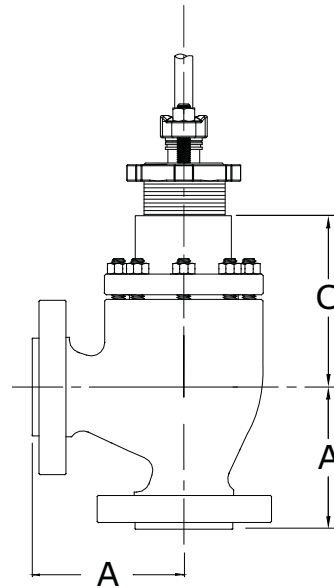

**STYLE 1  
EXTENSION  
BONNET**

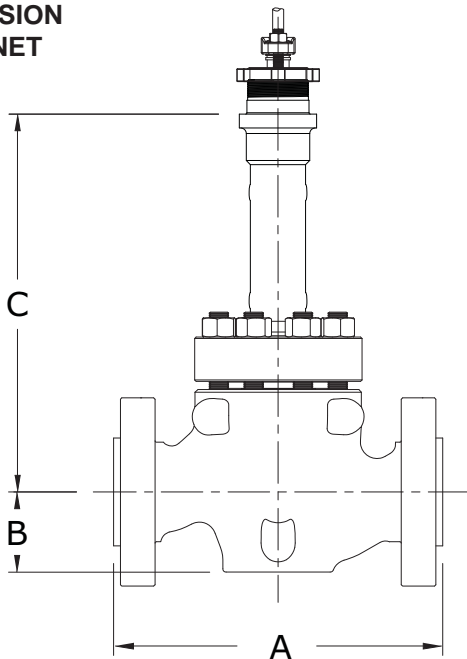

**BUTTWELD  
END  
CONNECTION**

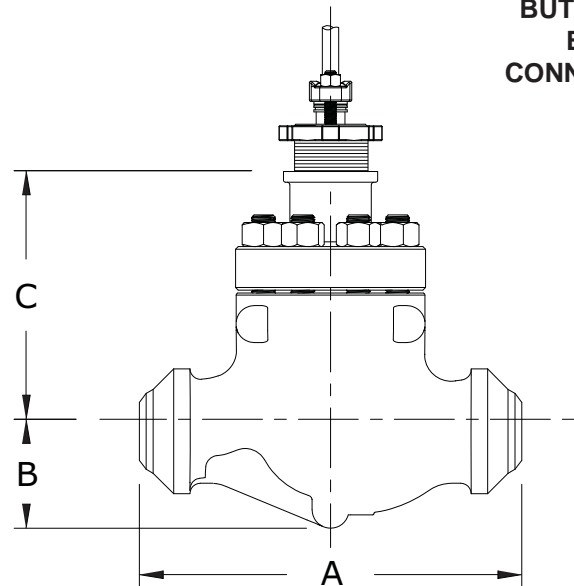


**Figure 2** Typical Valve Assembly Diagrams



# Model 362 Control Valves


## Technical Sales Bulletin

**Figure 3** Cross-section of 362 Series Control Valve

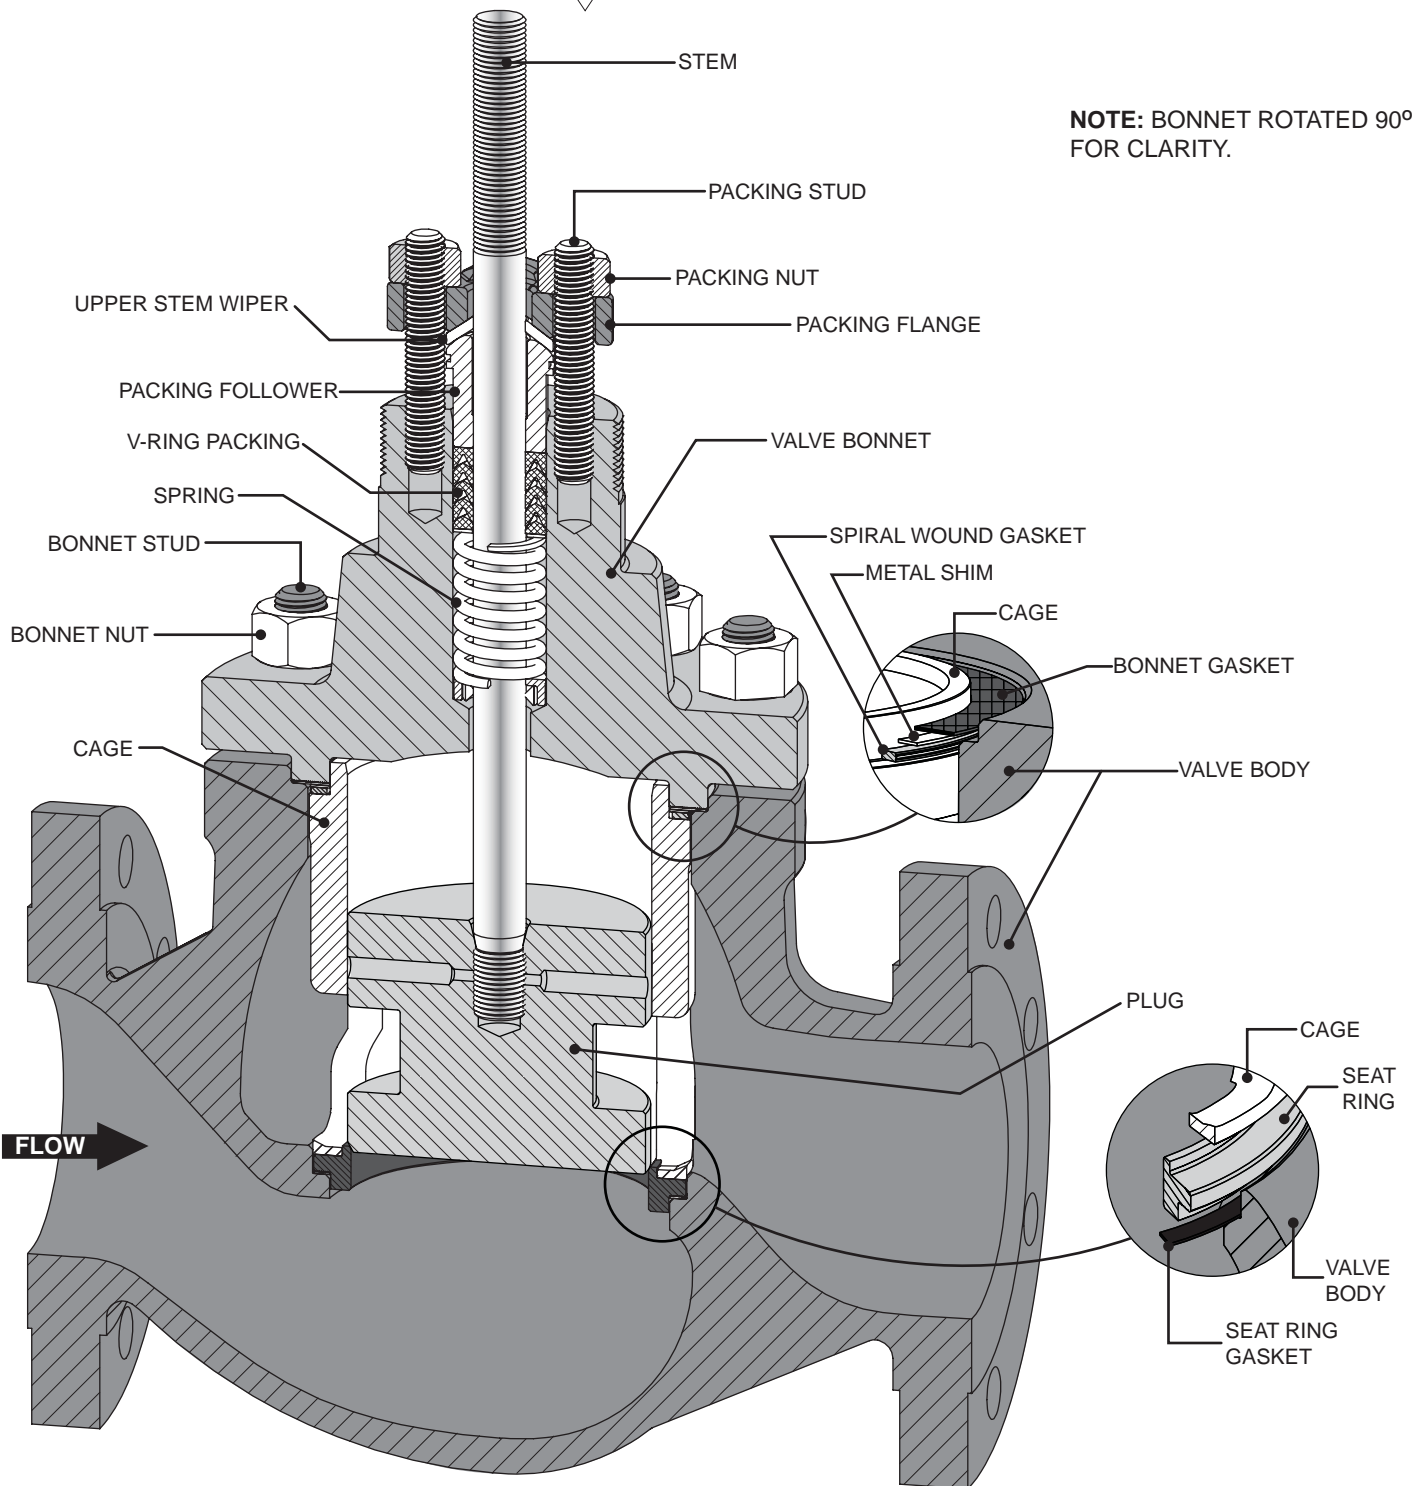


# Model 362 Control Valves


## Technical Sales Bulletin

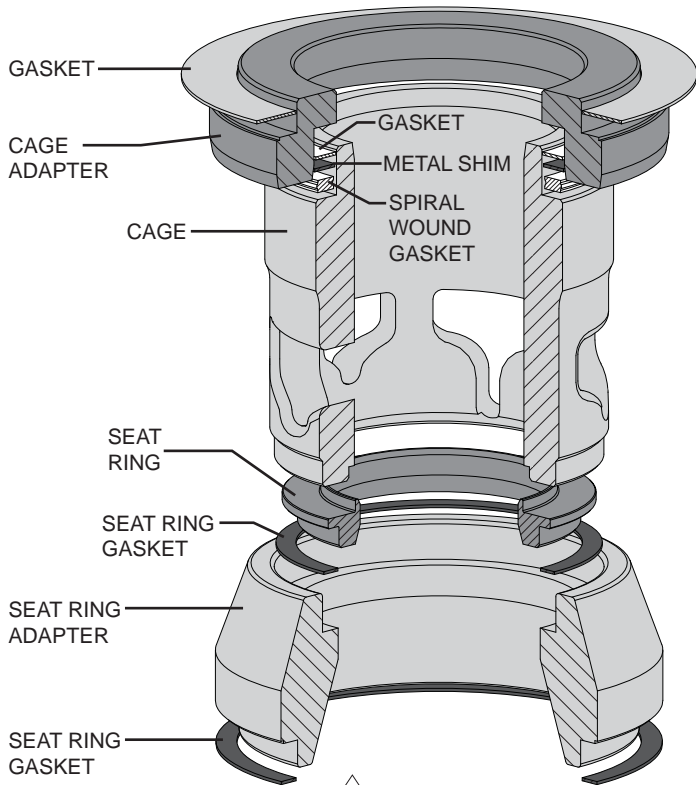

**Figure 4** *Reduced Port Trim Assembly Diagram*

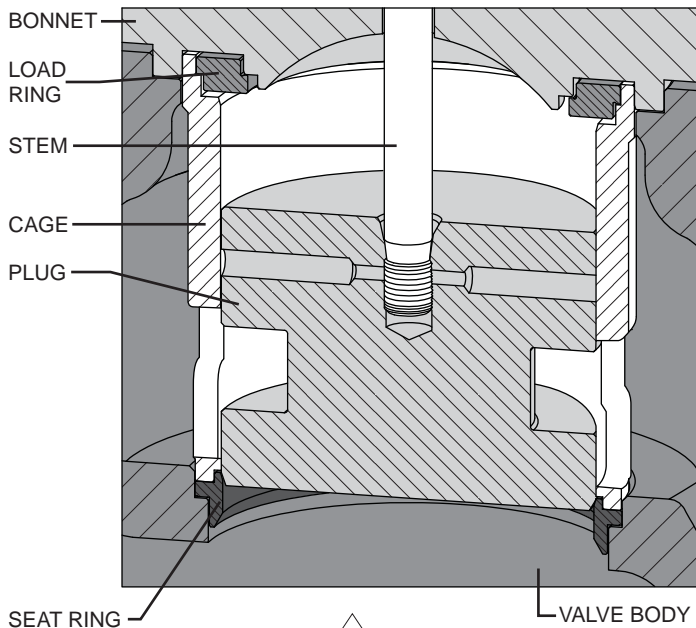

**Figure 5** *8 Inch Valve Assembly Load Ring Detail*

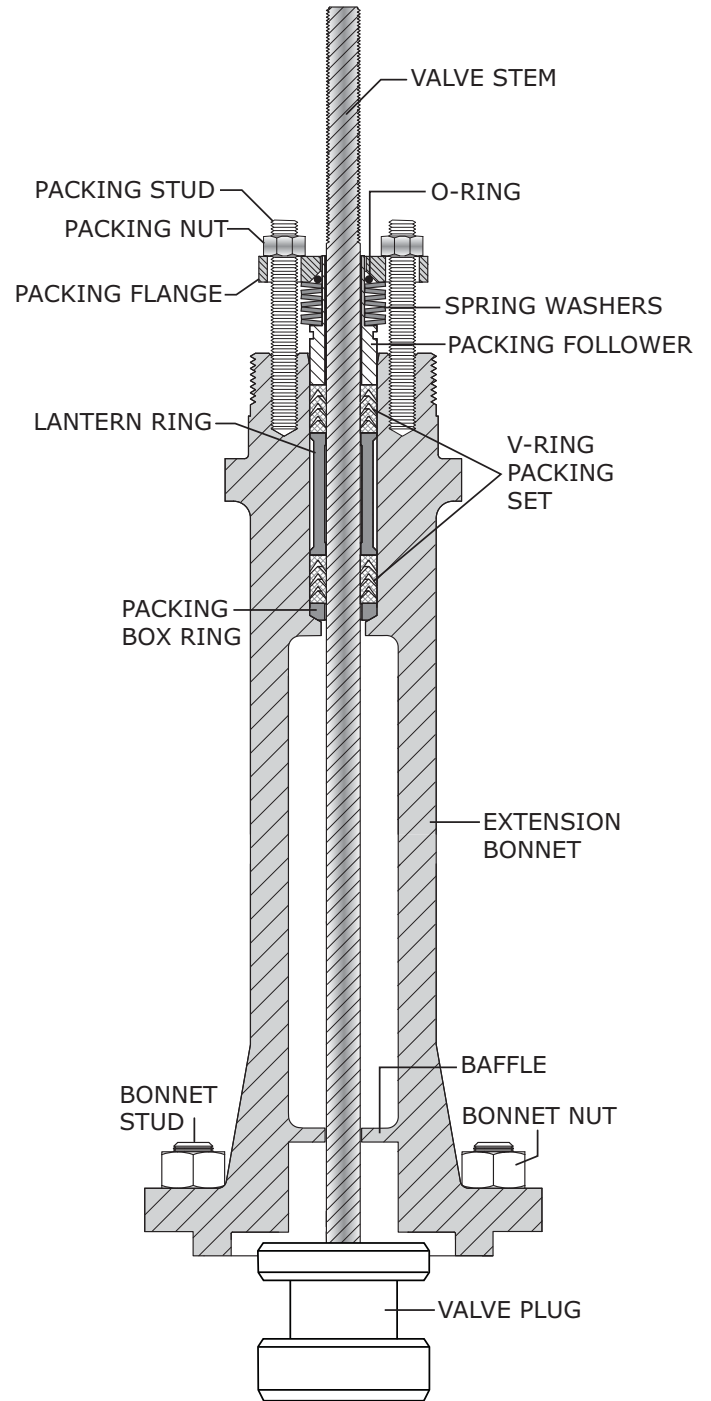

**Figure 6** *Model 362 Extension Bonnet Cross Section*

# Model 362 Control Valves

## Technical Sales Bulletin

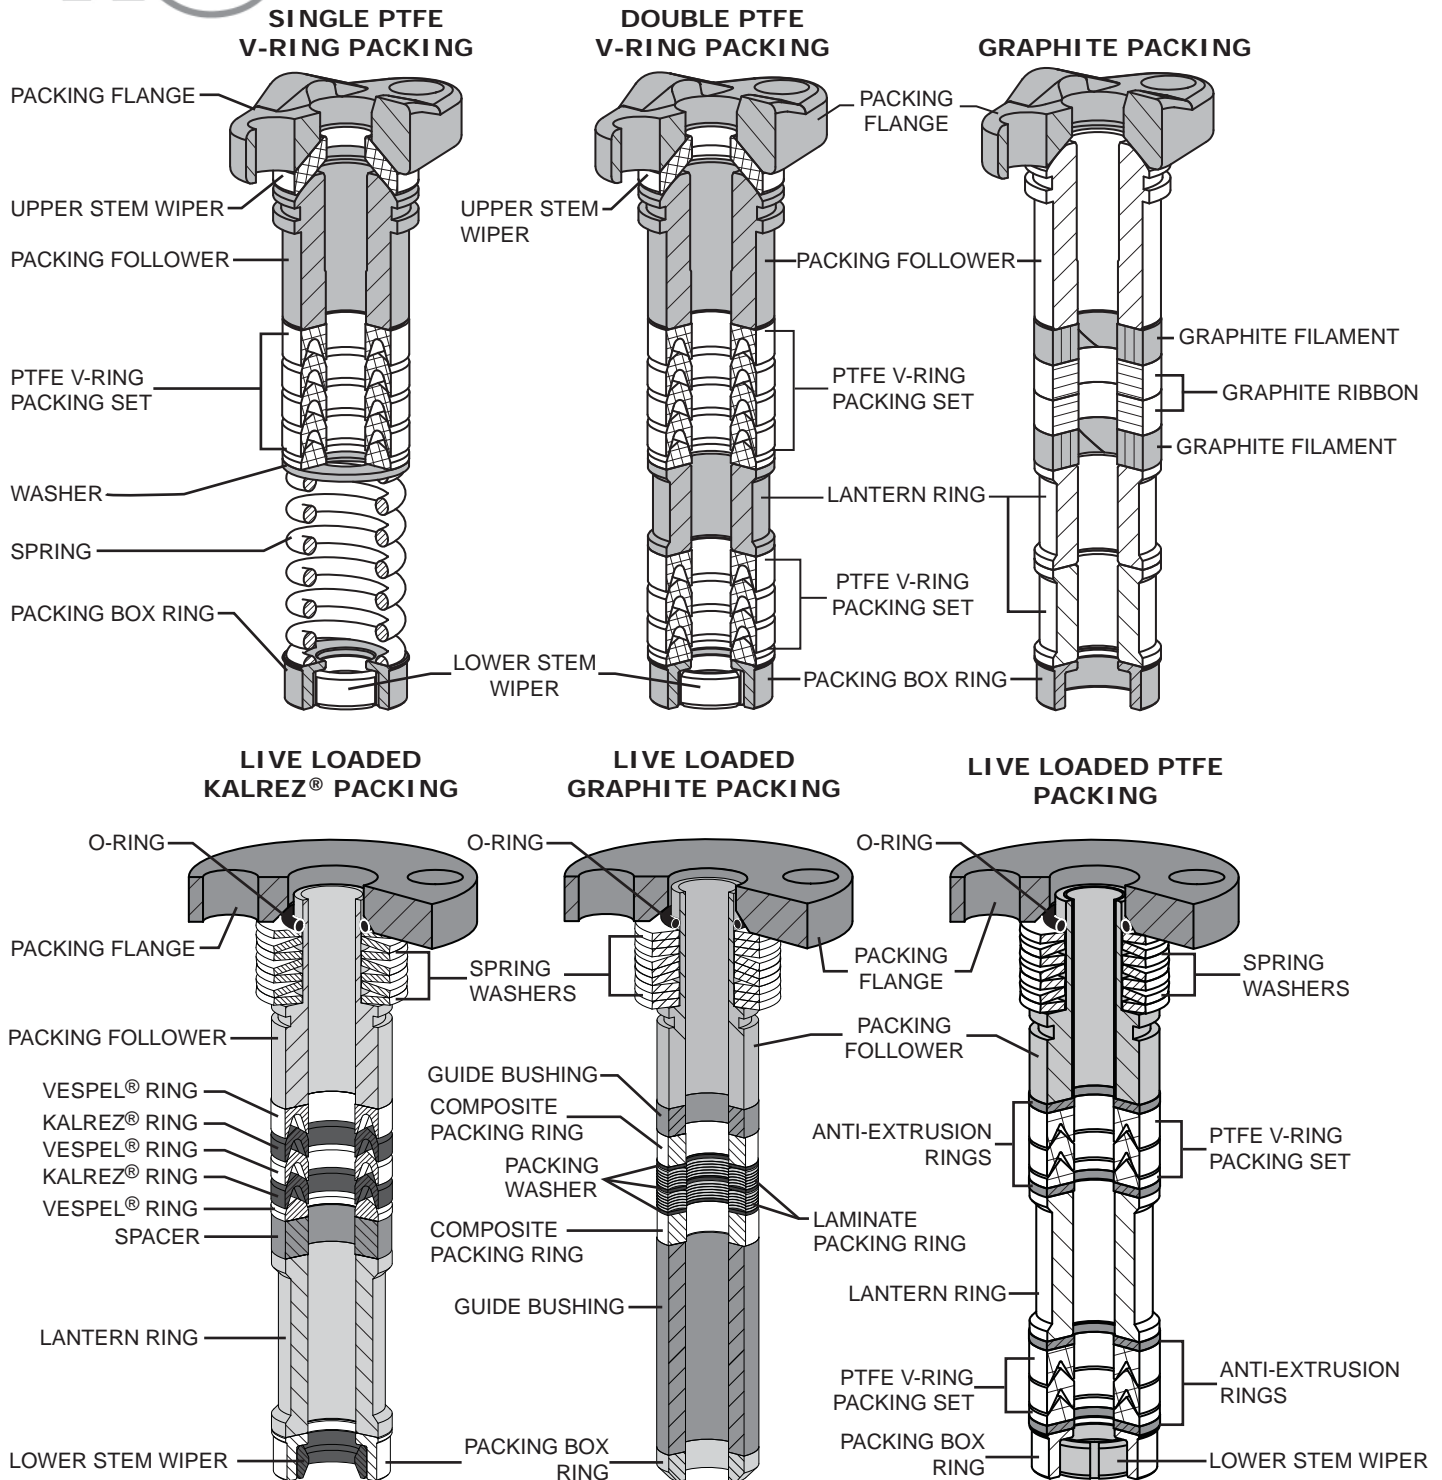


Figure 7 Typical Packing Arrangements

# Model 362 Control Valves

## Technical Sales Bulletin



Table 11

### Body to Bonnet Bolting Temperature Limitations

Body Material	ASME Class	Bolt/Nut Material	Temperature Limitations			
			Min. °F	Max. °F	Min. °C	Max. °C
LCC	150/300/600	B7/2H <sup>(1)(2)</sup>	-50	650	-46	343
		B7M/2HM <sup>(3)</sup>	-50	650	-46	343
WCC/WC9	150/300/600	B7/2H <sup>(1)(2)</sup>	-20	800	-29	427
		B7M/2HM <sup>(3)</sup>	-20	800	-29	427
CF8M	150/300/600	B7 Fluorokote #1 / 2H Fluorokote #1 (Standard) <sup>(2)</sup>	-50	500	-46	260
		B8M/8M <sup>(2)</sup>	-325	800	-198	427
		B7M Fluorokote #1/ 2HM Fluorokote #1 <sup>(3)</sup>	-50	500	-46	260

**NOTES:**

- 1 - Standard non-NACE option.
- 2 - NACE MR0175/ISO15156 Non-Exposed Bolting option (Bolting that is not directly exposed to sour environments and is not to be buried, insulated, equipped with flange protectors, or otherwise denied direct atmospheric exposure).
- 3 - NACE MR0175/ISO15156 Exposed Bolting option (Bolting that will be exposed directly to the sour environment or that will be buried, insulated, equipped with flange protectors, or otherwise denied direct atmospheric exposure).

Table 12

### Common Valve Parts Typical Construction Materials and Temperature Limitations

Part	Material	Temperature Limitations			
		Min. °F	Max. °F	Min. °C	Max. °C
Valve Stem	S20910	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>
Load Ring (8 Inch Valves Only)	S17400	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>
Cage Adapter (Reduced Trim)	S31600/S31603 Dual Grade	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>
Seat Ring Adapter (Reduced Trim)	S31600/S31603 Dual Grade	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>
Seat Ring / Bonnet / Cage Gaskets	S31600 / Graphite	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>	NLF <sup>(1)</sup>
Spiral Wound Gaskets	S30400 / Graphite	-50	650	-46	343
Shim	S30400	-50	650	-46	343
Packing	PTFE V-Ring	-50	450	-46	232
	Graphite (Ribbon/Filament)	-325	1000 <sup>(2)</sup>	-198	537 <sup>(2)</sup>

**NOTES:**

- 1 - NLF - This Material is Not A Limiting Factor. For the temperature limitation refer to the valve body material temperature limit.
- 2 - Oxidizing service limited to 700°F (371°C).



# Model 362 Control Valves

## Technical Sales Bulletin

Table 13

Bonnet and Packing Selection <sup>(1)</sup>		
Bonnet Style	Packing Material	In-Body Process Temperature Limitations
<b>Standard Bonnet:</b> Standard for valve sizes 1 through 6 inch.	PTFE V-Ring	0°F to 450°F (-18°C to 232°C)
	Graphite (Ribbon/Filament)	0°F to 1000°F (-18°C to 538°C) <sup>(2)</sup>
<b>Extension Bonnet Style 1:</b> Standard for 8 inch valves. Optional for valve sizes 1 through 6 inch.	PTFE V-Ring	-50°F to 600°F (-46°C to 316°C)
	Graphite (Ribbon/Filament)	-150°F to 1000°F (-101°C to 538°C) <sup>(2)</sup>
<b>Extension Bonnet Style 2:</b> Optional for 1 though 8 inch valve sizes.	PTFE V-Ring	-150°F to 600°F (-101°C to 316°C)
	Graphite (Ribbon/Filament)	-150°F to 1000°F (-101°C to 538°C) <sup>(2)</sup>

**1** The above temperatures assume the presence of an ambient temperature outside the valve body of 70°F (21°C) with no bonnet insulation. An extension bonnet may be required when operating valves in low temperatures to prevent damage that could occur from the formation of valve stem frost. Other limiting factors, such as trim material components, will have to be considered. Refer to the Live Loaded Sliding Stem Packing Manual (Part Number P-LLPS) for Live Loaded packing temperature limitations.

**2** Maximum temperature limited to 700°F (371°C) for oxidizing service.

**NOTE:** For temperatures above or below these standard temperatures consult Dyna-Flo.

Table 14

Trim Options (Refer to Figure 8 for pressure / Temperature Limits)					
Trim Spec	Valve Plug	Stem	Cage	Seat Ring	Service
D1	S41600 HT	S20910	S17400 H900	S41600 HT	Standard / Non-corrosive / High Temp
D2	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat	S20910	S17400 DH1150 <sup>(1)</sup>	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat	Corrosive / NACE High Temperature
D4	S31600 <sup>(2)</sup>	S20910	S17400 H900	S31600 <sup>(2)</sup>	General / Mild Corrosive
D5	S41600 HT	S20910	S17400 H900	S31600 <sup>(2)</sup> / PTFE	Standard / Non-corrosive / Tight Shut off
D6	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat & Guide	S20910	S17400 H900	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat	Standard / Mild Corrosive / Mild Erosive
D7	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat & Guide	S20910	S17400 DH1150	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat	Corrosive / High Temp / NACE / Mild Erosive
D8	S31600 <sup>(2)</sup>	S20910	S17400 DH1150 <sup>(1)</sup>	S31600 <sup>(2)</sup>	NACE / Corrosive
D9	S31600 <sup>(2)</sup>	S20910	S17400 DH1150 <sup>(1)</sup>	S31600 <sup>(2)</sup> / PTFE	NACE / Corrosive / Tight Shut off
DJ	S31600 <sup>(2)</sup>	S20910	S31600 <sup>(2)</sup> / ENC <sup>(1)</sup>	S31600 <sup>(2)</sup>	NACE
DT	S31600 <sup>(2)</sup>	S20910	S31600 <sup>(2)</sup> / ENC <sup>(1)</sup>	S31600 <sup>(2)</sup> / PTFE	NACE
DE	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat & Guide	S20910	S31600 <sup>(2)</sup> / ENC <sup>(1)</sup>	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat	NACE
DN	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat & Guide	S20910	S31600 <sup>(2)</sup> / ENC <sup>(1)</sup>	S31600 <sup>(2)</sup>	NACE Class VI Soft Metal
DR	S31600 <sup>(2)</sup> / Alloy 6 Hard Faced Seat & Guide	S20910	S17400 DH1150	S31600 <sup>(2)</sup>	NACE Class VI Soft Metal

**NOTE:**

**1** - ENC =Electroless Nickel Coating.

**2** - All S31600 barstock is dual grade S31600/S31603 (316/316L).



# Model 362 Control Valves

## Technical Sales Bulletin



Table 15

### Valve Body/Trim Option Temperature Limitations (Refer to Figures 8 for Pressure/Temperature limits)

Body Material	Trim Designation	Temperature Limitations			
		Min. °F	Max. °F	Min. °C	Max. °C
LCC	D1	-20	800	-29	427
	D2, D4, D6, D7, D8, DR	-50	410	-46	210
	D5	-20	400	-29	204
	D9	-50	400	-46	204
	DE, DN	-50	600	-46	316
	DJ	-50	450 <sup>(1)</sup>	-46	232 <sup>(1)</sup>
	DT	-50	400	-46	204
CF8M	DE, DN	-325	650	-198	343
	DJ	-325	450 <sup>(1)</sup>	-73	232 <sup>(1)</sup>
WCC	D1	-20	800	-29	427
	D2, D4, D6, D7, D8, DR	-20	410	-29	210
	D5, D9	-20	400	-29	204
	DE, DN	-20	600	-29	316
	DJ	-20	450	-29	232
	DT	-20	400	-29	204
WC9	D1	-20	800	-29	427
	D2, D4, D6, D7, D8, DR	-20	410	-29	210
	D5, D9	-20	400	-29	204
	DE, DN	-20	600	-29	316
	DJ	-20	450 <sup>(1)</sup>	-29	232 <sup>(1)</sup>
	DT	-20	400	-29	204

**NOTES:**

1 - Maximum temperature limited to 300°F (149°C) for non-lubricating service such as steam or dry gas.

Table 16

### Class VI Shut-Off Trim Options (Refer to Figure 8 for Pressure / Temperature Limits)

Valve Plug	Stem	Cage	Seat Ring	Temperature Limit
S41600 HT	S20910	S17400 H900	S31600 <sup>(2)</sup> / PTFE	-20°F to 450°F (-29°C to 232°C)
S31600 <sup>(2)</sup>	S20910	S31600 <sup>(2)</sup> / ENC <sup>(1)</sup>	S31600 <sup>(2)</sup> / PTFE	-325°F to 450°F (-198°C to 232°C)

**NOTE:**

1 - S31600 (ENC)\* available by special request (\*Electroless Nickel Coating).





2 - All S31600 barstock is dual grade S31600/S31603 (316/316L).



# Model 362 Control Valves

## Technical Sales Bulletin

Figure 8 Typical Valve Trim Pressure and Temperature Limitations

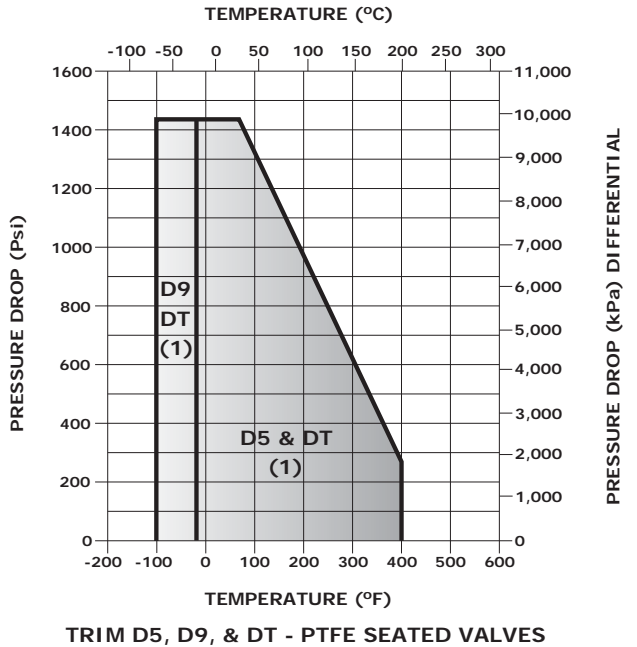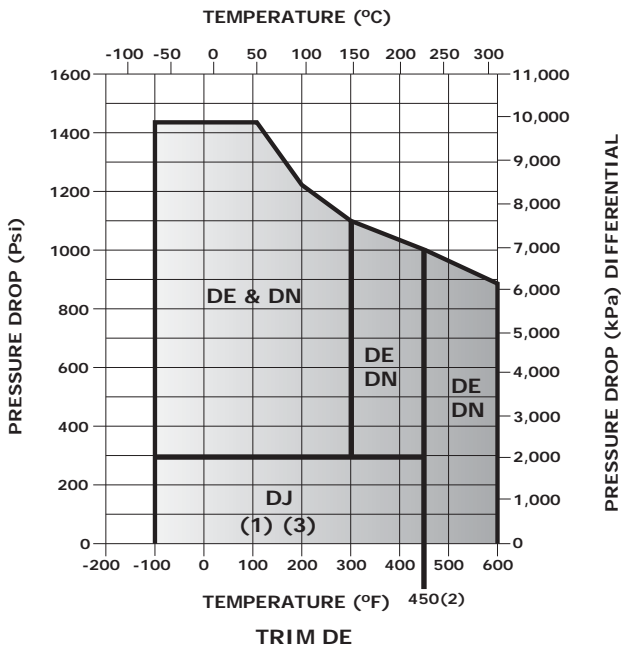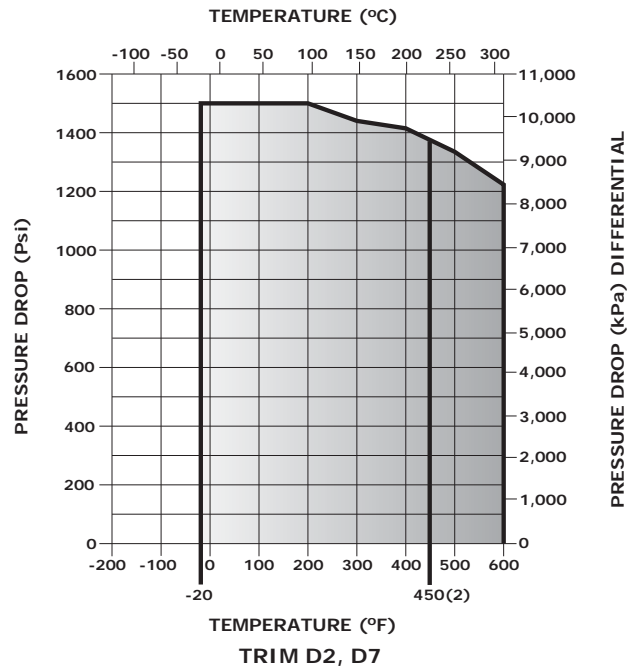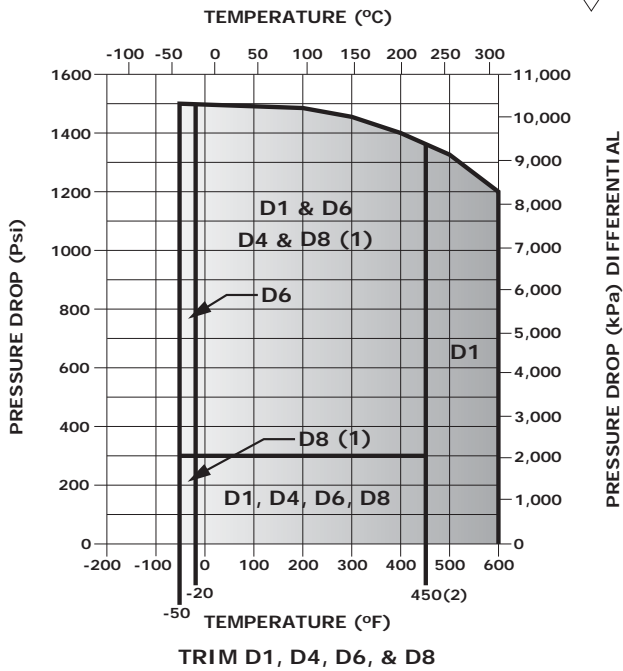

<b>NOTES:</b>	1 Trim can be used to 1,440 Psi (9,928 kPa) when used with clean dry gas. When used with other process fluids, do not exceed 300 Psi (2,068 kPa).
	2 Trim temperature limitations can be extended to 600°F (316°C) when used for non-oxidizing service.
	3 Use other trim for non-lubricating fluids (such as dry gas or steam) between 300°F (149°C) and 450°F (232°C).

# Model 362 Control Valves

## Technical Sales Bulletin



Table 17

### MAXIMUM SIZING COEFFICIENTS

FULL PORT

EQUAL PERCENTAGE CHARACTERISTIC

GLOBE BODY VALVE

FLOW UP

Valve Size Inches	Port Inches (mm)	Travel Inches (mm)	Coefficient	Percentage of Valve Travel
				100%
1	1-5/16 (33.3)	3/4 (19.1)	C <sub>v</sub>	17.4
1-1/2	1-7/8 (47.6)	3/4 (19.1)	C <sub>v</sub>	33.4
2	2-5/16 (58.7)	1-1/8 (28.6)	C <sub>v</sub>	56.2
3	3-7/16 (87.3)	1-1/2 (38.1)	C <sub>v</sub>	121
4	4-3/8 (111.1)	2 (50.8)	C <sub>v</sub>	203
6	7 (177.8)	2 (50.8)	C <sub>v</sub>	357
8	8 (203.2)	3 (76.2)	C <sub>v</sub>	808

**NOTE:** For the complete list of sizing coefficients refer to catalogue P-CVSM.

Table 18

### MAXIMUM SIZING COEFFICIENTS

FULL PORT

EQUAL PERCENTAGE CHARACTERISTIC

ANGLE BODY VALVE

FLOW DOWN

Valve Size Inches	Port Inches (mm)	Travel Inches (mm)	Coefficient	Percentage of Valve Travel
				100%
1	1-5/16 (33.3)	3/4 (19.1)	C <sub>v</sub>	19.0
2	1-7/8 (47.6)	3/4 (19.1)	C <sub>v</sub>	47.2
3	2-7/8 (73.0)	1-1/2 (38.1)	C <sub>v</sub>	148
4	3-7/16 (87.3)	1-1/2 (38.1)	C <sub>v</sub>	156
6	4-3/8 (111.1)	2 (50.8)	C <sub>v</sub>	328

**NOTE:** For the complete list of sizing coefficients refer to catalogue P-CVSM.

### *Our Commitment to Quality*

Dyna-Flo is committed to continuous improvement. While all efforts have been made to ensure the accuracy of the content in this document, modifications or improvements to the information, specifications, and designs may occur at any time without notice. This document was published for informational purposes only, and does not express or imply suitability, a warranty, or guarantee regarding the products or services described herein or their use or applicability.

Neither Dyna-Flo Control Valve Services Ltd., nor any of their affiliated entities assumes responsibility for the selection, use and maintenance of any product. Responsibility for selection, use and maintenance of any product remains with the purchaser and end-user.



# Model 362 Control Valves

## MODEL NUMBERING SYSTEM

**SAMPLE PART NUMBER: 362-2AFL-1FP2-ES-4**

<b>BODY STYLE</b>						-	
-	GLOBE BODY				A	ANGLE BODY	
<b>VALVE SIZE</b>						2	
1	1 INCH	5	1-1/2 INCH	2	2 INCH	3	3 INCH
4	4 INCH	6	6 INCH	8	8 INCH		
<b>ASME RATING</b>						A	
A	150	B	300	C	600		
<b>END CONNECTION</b>						F	
F	RF	J	RTJ	N	NPT	T	BWE SCH 40
L	BWE SCH 80						
<b>BODY MATERIAL</b>						L	
L	LCC	W	WCC	M	CF8M	9	WC9
<b>BOLTING</b>						-	
-	B7 / 2H (STANDARD)			A	B7M / 2HM		
B	B8M / 8M			K	B7 / 2H FLUOROKOTE #1		
L	B7M / 2HM FLUOROKOTE #1						
<b>TRIM</b>						1	
1	TRIM D1	2	TRIM D2	4	TRIM D4	5	TRIM D5
6	TRIM D6	7	TRIM D7	8	TRIM D8	9	TRIM D9
L	TRIM DL	J	TRIM DJ	T	TRIM DT	E	TRIM DE
N	TRIM DN	R	TRIM DR				
<b>PORT SIZE</b>						F	
F	FULL PORT		R	REDUCED PORT			
<b>PACKING STYLE</b>						P	
P	SINGLE PTFE V-RING (PRESSURE)			J	DOUBLE PTFE V-RING (PRESSURE)		
G	SINGLE GRAPHITE (PRESSURE)			V	DOUBLE PTFE V-RING (VACUUM)		
R	DOUBLE PTFE V-RING (VACUUM / PRESSURE)			L	LIVE LOADED PTFE V-RING (PRESSURE)		
T	LIVE LOADED GRAPHITE (PRESSURE)			D	LIVE LOADED DUPLEX (PRESSURE)		
K	LIVE LOADED KALREZ®						
<b>YOKE BOSS SIZE</b>						2	
1	2-1/8" (3/8" STEM)	2	2-13/16" (1/2" STEM)	3	3-9/16" (3/4" STEM)	5	5" (1" STEM)
<b>PAINT</b>						-	
-	DFPS-01 (STANDARD)			2	DFPS-02 (SEVERE SERVICE)		
3	DFPS-03 (HIGH TEMPERATURE)						
<b>CHARACTERISTIC</b>						E	
E	EQUAL PERCENTAGE			L	LINEAR		
Q	QUICK OPEN			N	LOW-NOISE I (LINEAR)		
Z	LOW-NOISE III A1 (LINEAR)			Y	LOW-NOISE III B3 (LINEAR)		
C	LOW-NOISE III C3 (LINEAR)			1	LOW-NOISE III D1 (LINEAR)		
D	LOW-NOISE III D3 (LINEAR)						
<b>BONNET STYLE</b>						S	
S	STANDARD (1" TO 6" VALVES)			E	EXTENSION STYLE 1		
H	EXTENSION STYLE 2			T	STANDARD (TAPPED)		
<b>SHUT-OFF CLASS</b>						4	
4	CLASS IV	6	CLASS VI				

**362**